


低压直流隔断保护器 Low Voltage DC-BLOCK

产品型号 Product model:
DB3-N-JK2



工作电路图 Working circuit diagram:

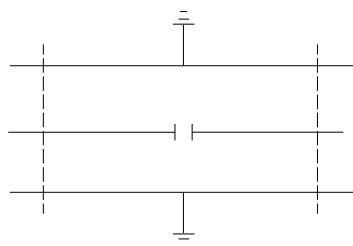

电气性能 Electrical Characteristics:

特性阻抗 Impedance	50Ω
频率范围 Frequency range	50~3000 MHz
最大承受电压 Blocking voltage	≤1000 V 1min. DC
插入损耗 Insertion loss	≤0.2 dB (50~1500 MHz) ≤0.5 dB (1500~3000 MHz)
电压驻波比 VSWR.	≤1.10 (50~1500 MHz) ≤1.15 (1500~3000 MHz)
内导体漏电流 Inner con. leakage current	≤0.04 mA
绝缘电阻 Insulation resistance	≥5000 MΩ

使用环境 Environmental conditions:

工作温度 Operating Temperature	-55℃~100℃
保存温度 Storage temperature	-55℃~100℃
防水等级 Waterproof:	IP65